



# TV-Clip Mount

## Package Contents

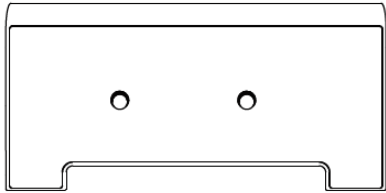

M-1

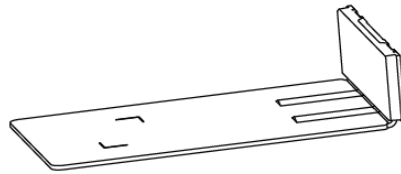


M-2



VESA Screwx2



Velcrox2  
(One Velcro is on the M-2)







Quick Start Guide

## Assembling the TV Clamp

### ① NOTE

As the device is heavy, it is not recommended that it be used on skinny TVs to avoid the device falling or to crush the screen easily.

This guide is applicable to MeetingBar A20/UVC40, taking MeetingBar A20 as an example.

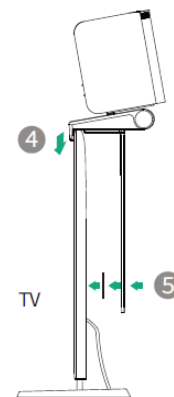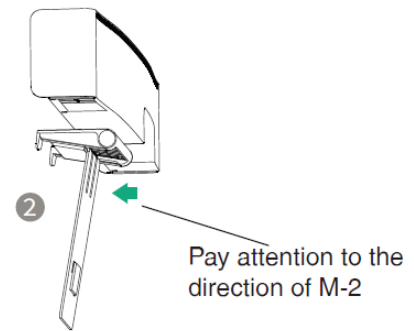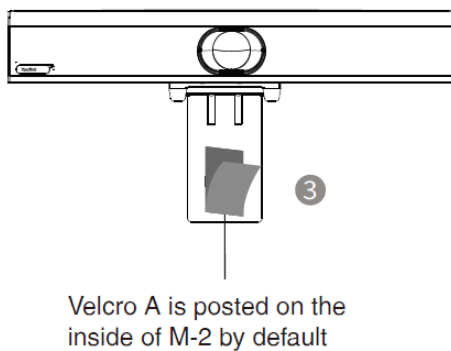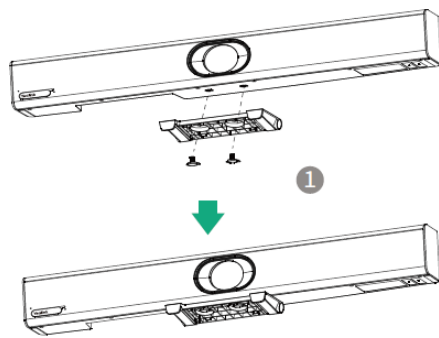

1. Use VESA screws to fix M-1 and MeetingBar A20.
2. Push the M-2 along the track of the M-1.
3. Remove one Velcro on the M-2.
4. Put the bracket on the top of the TV.
5. Stick another Velcro onto the back of the TV (Velcro is a one-time use, please clean the back of the TV before sticking), and make sure that the bracket and the back of the TV are tightly positioned against each other.

## Device Compatibility

The maximum number of TV-Clip Mount supported by the conferencing room endpoint is as follows:

Device Name	Max. number of TV-Clip Mount supported
MeetingBar A10, MeetingBar A30	×
MeetingBar A20	√
MVC 2nd-Gen Series, ZVC Series	×
MeetingEye 500	×